



SHELF SUPPORTS



# SYMBOLS AND FINISHES LEGEND

### **SYMBOLS**



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= NEWTON



= PART.NO



= HEXAGONAL SOCKET



= FRICTION



= PCS. PER PACKAGE



= BLADE SLOT



= AUTOMATIC



= COMBI SLOT



= DROP DOWN



= CAPACITY LOADING



= COUNTERSUNK HEAD





= STANDARD HINGE



= WOOD / GLASS THICKNESS



= FLANGE HEAD

= PAN HEAD



= KIMANA HINGE



= DIAMETER

= HOLE DIAMETER



= FLAT HEAD



= FLAP HINGE



= LENGTH



= TRILOBULAR SCREW



= WITH SPRING



= HEIGHT



= SELF-TAPPING SCREW



= WITHOUT SPRING



= RIGHT VERSION



= EURO THREAD



= REVERSED SPRING



= LEFT VERSION



= METRIC THREAD



= PRE-INSERTED SCREW



= FOR ROUND TUBE



= SETTING CODE



= PRE-INSERTED SCREW AND SPREADING BUSH



= FOR OVAL TUBE



= PCS. PER PAD

= CUT ON REQUEST



= WITH BUFFER



= SELF ADHESIVE




= WITH MAGNET




= WITH FLANGE

NOTE: Printing errors and omissions may exist despite our best efforts to ensure accurancy. We reserve the right to alter specifications without notice.

## **MATERIALS**

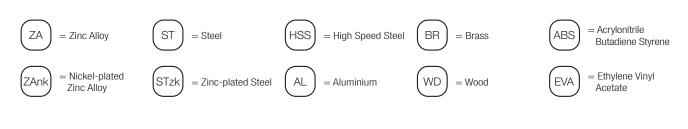

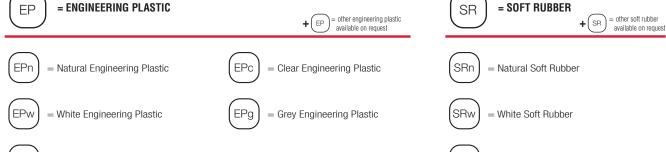

= OTHER FINISHES AVAILABLE

| EPwg | = Water Green Engineering Plastic | SRb | = Black Soft Rubber |
|------|-----------------------------------|-----|---------------------|
|      |                                   |     | ,                   |
|      |                                   |     |                     |







### **UNICO**

UNICO is the new concept in wood shelf supports, to be slotted into the panel by making

borings. Useful for both flat pack and rigid furniture it is conceived for transport too as the shelf

is secured in position.

It consists of a zinc alloy shelf support with a ridged wing on both sides combined with a sliding engineering plastic clip.

When the sliding clip moves forwards, its wedge shape inside the shelf support applies a pressure against the two zinc alloy ridged wings. Quicker installation of the shelf; just place in the required position the shelf supports with the wings already spread and then push downwards the shelf. The ridged wings grip into the chipboard and lock the shelf in position. Easy repositioning of the shelf; just move backwards the sliding clips through the fingernail or screwdriver blade sockets, the wings retreat. Push upwards the shelf to release. For shelf minimum 15mm thick.






Unico Ø 5 and euro screw versions are in accordance with the regulation: UNI EN 14749/05.


### PAT. PENDING





Assembling with smooth pin


Assembling with threaded pin to achieve horizontal connection





Unico is supplied with the sliding clip already in the forward position ready for installation




SHELF INSTALLATION









SHELF REMOVAL FOR NEW REPOSITIONING










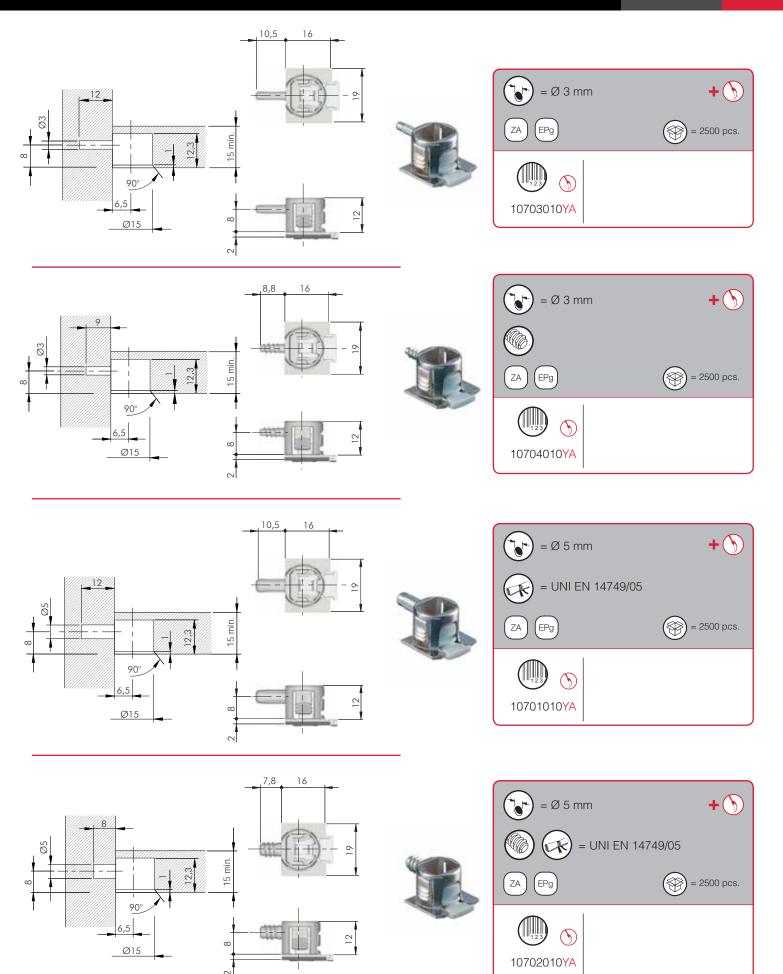







## **DRILL BIT FOR UNICO**












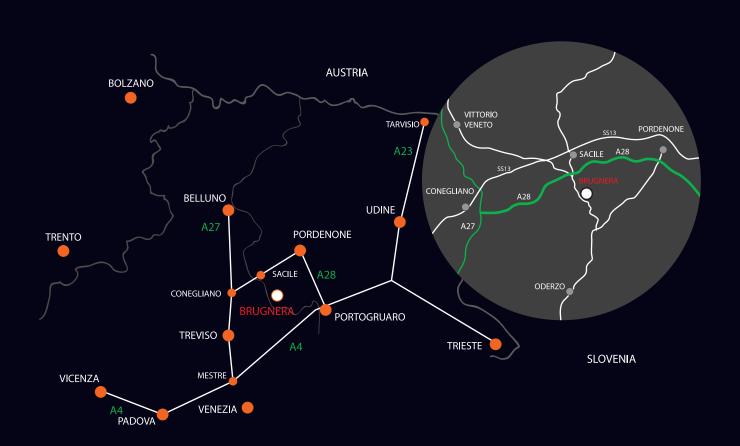



www.italianaferramenta.com